
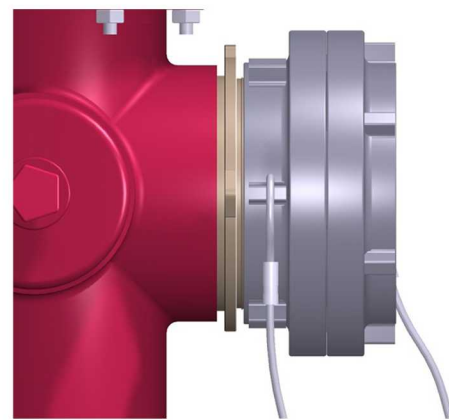
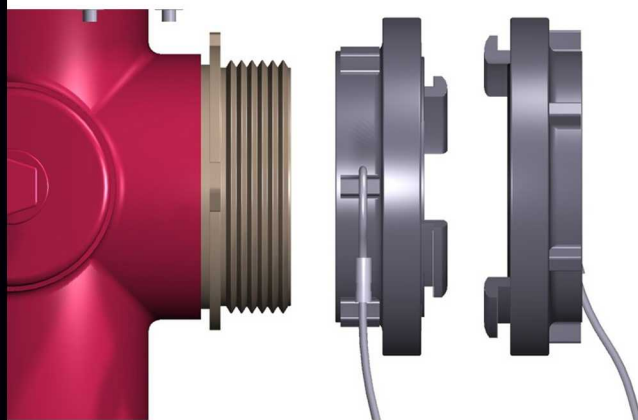


HARRINGTON PERMANENT HYDRANT ADAPTER™

Harrington Permanent Hydrant Adapter™ - Metal Face Storz adapter with female thread, secured permanently to the hydrant, including Storz Blind Cap with Suction Seal and Aircraft Cable.

Harrington, Inc.
2630 West 21st Street
Erie, PA 16506
800-553-0078

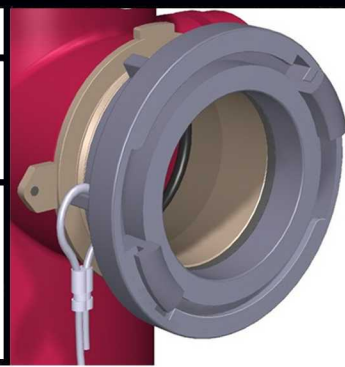

HPHA™ SPECIFICATIONS

The Permanent Hydrant Adapter threads onto the male nozzle and is secured permanently to the hydrant. A Storz spanner wrench is required for cap removal.

The Storz adapter shall have a hard anodized aluminum metal face seal and hard anodized aluminum Storz ramps and lugs. The adapter's finish shall be hardcoat anodized to Mil-A-8625f, Type 3, dark gray. The adapter shall be made of forged or extruded 6061-T6 aluminum and secured to the nozzle by 2 stainless steel set screws, inserted 180° apart. The female adapter shall contain a flat rubber gasket which seals against the male hydrant nozzle.

The blind cap shall have hard anodized aluminum Storz ramps and lugs, made of forged or extruded 6061-T6 aluminum. The center cap shall be equipped with a suction seal. The cap shall be connected to the adapter or the hydrant with a 0.125" vinyl coated aircraft cable. The high torque cap requires a Storz spanner wrench for removal. Once installed, the Permanent Hydrant Adapter with cap extends less than 3" from the hydrant nozzle.

SPECIFY: HPHA