


# HARRINGTON STORZ SPECIFICATION SHEET

## HFL-RF-405030E/Cap

4" Raised Face threaded 150# Carbon Steel Flange  
- Zinc Rich Primer & Powder Coated

Hard Anodized 6061-T6 Aluminum  
Mil-A-8625f, Type 3

- 30° Elbow (356), 4" NPT male x 5" BSP male  
Zinc Rich Primer & Powder Coated
- 5" Storz with Storz-Lok  
with 5" BSP Gasket, 5" Storz Pressure Seal
- 5" Storz Cap (center cap: 356)  
with 5" Storz Suction Seal,  
attached with stainless steel aircraft cable
- 250 psi working pressure

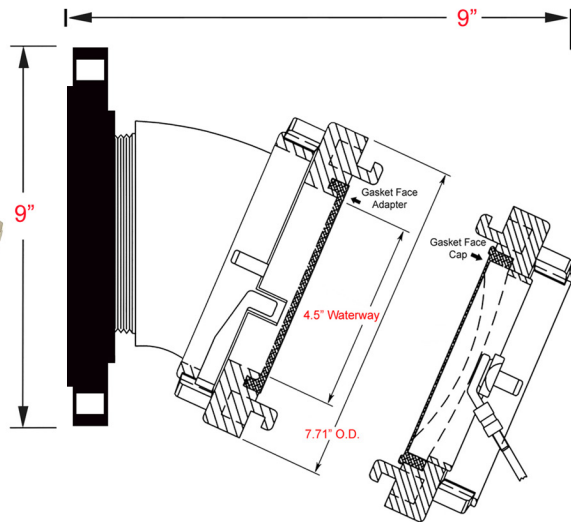

Specify **HARRINGTON STORZ: HFL-RF-405030E/Cap**



**Harrington**  
STORZ CONNECT

2630 West 21st Street  
Erie, PA 16506

ph. 800-553-0078  
info@harrinc.com



## HFL-RF-405030E/Cap

4" raised face 150# flange x Elbow 30° 5" Storz with  
Storz Cap attached with stainless steel aircraft cable

Date: 01/01/23

Weight: 21 lbs.

Specification / Data Sheet

Not to scale



**NFPA 1963 COMPLIANT**

150# Flange