#### HARRINGTON STORZ SPECIFICATION SHEET

### HFL-RF-60-50ST/Cap 6" Raised Face 150# Carbon Steel Flange

- Weldneck Flange machined to 6" BSP male


- Zinc Rich Primer & Powder Coated

-Hard Anodized 6061-T6 Aluminum Connections, Hard Anodized to Mil-A-8625f, Type 3 - 6" BSP female x 5" BSP male with 6" BSP Gasket

- 5" Storz with Storz-Lok with 5" BSP Gasket, 5" Storz Pressure Seal

- 5" Storz Cap (center cap: 356) with 5" Storz Suction Seal. attached with stainless steel aircraft cable

- 250 psi working pressure

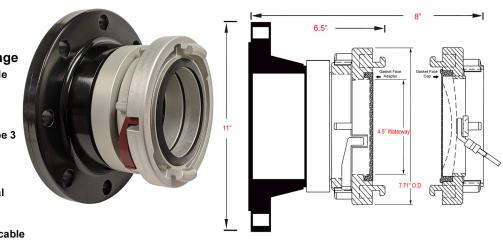

#### Specify HARRINGTON STORZ: HFL-RF-60-50ST/Cap



## Harrington STORZ CONNECT

2630 West 21st Street

Erie, PA 16506

ph. 800-553-0078 info@harrinc.com



# HFL-RF-60-50ST/Cap

6" raised face 150# flange x 5" Storz with Storz Cap attached with stainless steel aircraft cable

Date: 01/01/23 Weight: 30 lbs. Specification / Data Sheet

Not to scale



NFPA 1963 COMPLIANT 150# Flange